
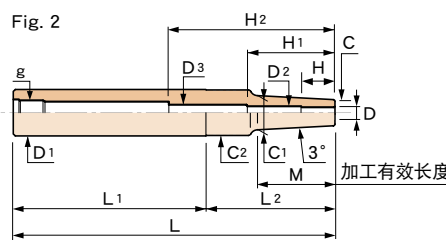


标准型

ST25-SLSA10-255

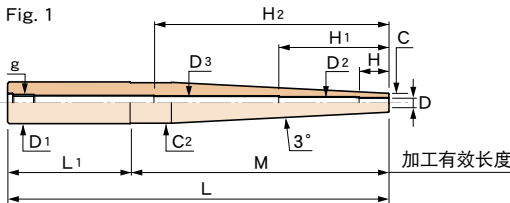

■注意事项

- 刀具安装…插入刀具时,请务必将刀具插入比安全记号更深的位置。

HEATROBO电磁 1200S (HRD-01S-230AS) 电磁式加热器对应表

[○] 可加热 [×] 不可加热
 [▲] 垫高加热器后可进行加热 →P.217

型号	Fig.	φD	φC	t	L	M	D1	H	L1	L2	φC1	φC2	g	h	Kg	φD2	φD3	H1	H2
ST10-SLSA3- 80-M 35	1	3	6	1.5	80	35	10	9	45	-	-	9.3	M 6	64	0.03	4	-	49.6	-
ST16-SLRA3- 90-M 22	2		7.5	2.25	90	22	16		60	30	9.8	15.5	M10	62	0.09			33.7	
-SLSA3-115-M 42			6	1.5	115	42				55	10.4			87				53.7	
-SLRA3-115-M 42			7.5	2.25					65	50	11.9				0.1				
-SLSA3-140-M 67			6	1.5	140	67			60	80	13			112		6	54.4	84.3	
-SLRA3-140-M 67			7.5	2.25					65	75	14.5								
ST20-SLRA3-175-M 97					175	97	20		70	105	17.7	19.5		147				53.4	109.3
-SLSA3-200-M 97			6	1.5	200				90	110	16.2			172	0.3			54.4	104.3
ST25-SLSA3-245-M 97					245		25		120	125		24.5		217	0.6		5	49.7	105.3
-SLRA3-245-M 97			7.5	2.25							17.7							47.5	99.5
-SLSA3-315-M195	1		6	1.5	315	195				-	-			287				49.7	112.1
-SLRA3-315-M 67	2		7.5	2.25		67			220	95	14.5				0.9				75.3
ST10-SLSA3.175-80-M35	1	3.175	6.175	1.5	80	35	10	10	45	-	-	9.3	M 6	64	0.03	4	-	49.6	-
ST10-SLSA4- 80-M 35	1	4	7	1.5	80	35	10	12	45	-	-	9.5	M 6	64	0.03	5	-	50	-
ST16-SLRA4- 90-M 22	2		10	3	90	22	16		60	30	12.3	15.5	M10	62	0.09			34	
-SLSA4-115-M 42			7	1.5	115	42				55	11.4			87	0.1			64	
-SLRA4-115-M 42			10	3					65	50	14.4							54	
-140-M 60	1				140	60			80	-	-			112				64	
ST16-SLSA4-140-M 67	2		7	1.5		67			60	80	14					6	64.7	84.3	
ST20-SLRA4-175-M 95	1		10	3	175	95	20		80	-	-	19.5		147	0.3			53.7	99.3
-SLSA4-200-M 97	2		7	1.5	200	97			90	110	17.2			172			7	39.4	104.5
ST25-SLSA4-245-M 97					245		25		120	125		24.5		217	0.6		6	49.7	105.6
-SLRA4-245-M 97			10	3							20.2							50.5	100.5
-315-M 67					315	67			220	95	17			287	0.9				70.5
-SLSA4-315-M195	1		7	1.5		195			120	-	-				0.7			49.7	112.4
ST10-SLSA5- 80-M 35		5	8	1.5	80	35	10	15	45			9.5	M 6	70	0.03	-		-	
ST20-SLSA5-200-M110					200	110	20		90			19.2	M10	182	0.3	6		69.3	
ST25-SLSA5-290-M 97	2				290	97	25		180	110	18.2	24.5		272	0.8		7	69.7	114.5

型号	Fig.	φD	φC	t	L	M	D1	H	L1	L2	φC1	φC2	g	h	Kg	φD2	φD3	H1	H2	
ST12-SLSA6- 80-M 35	1	6	9	1.5	80	35	12	18	45	—	—	11.5	M 8	52	0.04	—	—	—	—	
ST16-SLSA6-115-M 42	2				115	42	16		60	55	13.4	15.5	M10	87	0.1	7			84.5	
-SLSB6-115-M 42			10	2					65	50	14.4								54.5	
ST20-SLRB6-120-M 42			14	4	120		20		70		18.4	19.5			92	0.2				
ST16-SLSB6-140-M 60	1		10	2	140	60	16		80	—	—	15.5			112	0.1			64.5	
-SLSA6-140-M 70			9	1.5		70			70										74.5	
ST20-SLSA6-175-M105				175	105	20				19.5			147	0.3			109.5			
-SLSB6-175-M 95		10	2		95		80										99.5			
-SLRB6-175-M 60		14	4		60		115										64.5			
ST25-SLSB6-205-M127	2	10	2	205	127	25	70	135	23.3	24.5			177	0.5			104.5			
-SLSA6-230-M 97		9	1.5	230	97		120	110	19.2				202				94.5			
-SLRB6-240-M 42		14	4	240	42		170	70	18.4				212	0.7		11	50.8	160		
ST32-SLSB6-255-M157		10	2	255	157	32	70	185	26.5	31.5	M16	227	0.8			8	49.7	107.4		
ST25-SLSA6-305-M185	1	9	1.5	305	185	25	120	—	—	24.5	M10	277					91.7	166.1		
ST32-SLRB6-345-M 67	2	14	4	345	67	32	250	95	21	31.5	M16	317	1.6				50.5	73.5		
-SLSB6-375-M157		10	2	375	157		190	185	26.5			347	1.4				49.7	107.4		
ST25-SLSA7-230-M 97	2	7	10	1.5	230	97	25	20	120	110	20.2	24.5	M10	212	0.5	8	—	69.8	—	
-320-M 97					320				210					302	0.9	7.5		44.7		
ST20-SLRB8-100-M 30	1	8	18	5	100	30	20	24	70	—	—	19.5	M10	72	0.2	—	—	—	—	
ST16-SLSA8-115-M 50			11	1.5	115	50	16		65			15.5		87	0.1					
ST20-SLSB8-145-M 70			13	2.5	145	70	20		75			19.5		117	0.2					
ST25-SLRB8-160-M 42	2		18	5	160	42	25		110	50	22.4	24.5		132	0.5					
ST20-SLSA8-175-M 85	1		11	1.5	175	85	20		90	—	—	19.5		147	0.3					
ST25-SLSB8-175-M 97	2		13	2.5		97	25		70	105	23.2	24.5			0.4					
-SLRB8-210-M 90	1	18	5	210	90		120	—	—			182	0.6	9	11	71.4	150			
-SLSA8-230-M 97	2	11	1.5	230	97			110	21.2			202		—	—	—	—			
-SLSB8-260-M140	1	13	2.5	260	140			—	—			232	0.7	9	11	121.4	200			
-SLSA8-280-M160		11	1.5	280	160							252				141.4	220			
ST32-SLRB8-285-M67	2	18	5	285	67	32	190	95	25	31.5	M16	257	1.3			14	75.8	185		
-SLSB8-375-M157		13	2.5	375	157			185	29.5			347	1.5			12	94.1	166.4		
ST25-SLSA9-230-M 97	2	9	12	1.5	230	97	25	30	120	110	22.2	24.5	M10	60	0.6	9.6	—	61	—	
-320-M 97					320				210						0.9					
ST25-SLRB10-120-M 35	1	10	22	6	120	35	25	30	85	—	—	24.5	M10	60	0.4	10.6	—	61	—	
ST20-SLSB10-120-M 50			16	3		50	20		70			19.5			0.2					
ST25-SLSB10-145-M 67	2				145	67	25			75	23	24.5			0.4					
ST20-SLSA10-145-M 70	1		13	1.5		70	20		75	—	—	19.5			0.2					
ST25-SLSB10-175-M105			16	3	175	105	25		70			24.5			154	0.5	11		155	
-SLRB10-210-M 90			22	6	210	90			120						149	0.7			150	
ST32-SLSB10-240-M170		16	3	240	170	32	70			31.5	M16	212	0.9			14	151.1	200		
ST25-SLSA10-255-M135		13	1.5	255	135	25	120			24.5	M10	194	0.7			—	195	—		
-SLSB10-275-M105		16	3	275	105		170						0.8							
ST32-SLRB10-285-M 67	2	22	6	285	67	32	190	95	29	31.5	M16	257	1.4			14	76.1	185		
-SLSA10-340-M210	1	13	1.5	340	210		130	—	—			312	1.3				191.1	270		
-SLSB10-360-M170		16	3	360	170		190					332	1.5				151.1	260		
ST42-SLSB10-445-M157	2			445	157	42	260	185	32.5	41.5	M24	417	2.7				97.1	165		
ST25-SLSA11-230-M110	1	11	14	1.5	230	110	25	30	120	—	—	24.5	M10	60	0.6	11.6	—	61	—	
-320-M110					320				210						0.9					



特点
加热装置
一体型 3°
一体型 CURVE
一体型系列
2 体型系列
UNO
强力型 热接力棒
Z
直柄延长杆
相关商品
周边机器
技术资料



型号	Fig.	φD	φC	t	L	M	D1	H	L1	L2	φC1	φC2	g	h	Kg	φD2	φD3	H1	H2		
ST25-SLSB12-120-M 42	2	12	19	3.5	120	42	25	30	70	50	23.4	24.5	M10	60	0.3	12.6	-	61	-	○	
ST20-SLSA12-120-M 50	1		15	1.5		50	20			-	-	19.5			0.2					○	
ST32-SLRB12-140-M 60			26	7	140	60	32		80			31.5	M16	112	0.7	13		109.5		×	
ST25-SLSB12-150-M 80			19	3.5	150	80	25		70			24.5	M10	60	0.4		11	61	130	○	
ST32-SLSB12-220-M150					220	150	32					31.5	M16	192	0.9		14	131.7	180	○	
ST25-SLSA12-230-M110			15	1.5	230	110	25		120			24.5	M10	60	0.6	12.6	11	61	-	○	
-SLSB12-250-M 80			19	3.5	250	80			170					80	0.8	13			170	○	
ST32-SLRB12-260-M 70			26	7	260	70	32		190			31.5	M16	232	1.3		14	51.7	160	×	
-SLSA12-315-M185			15	1.5	315	185			130					287	1.2				166.7	245	○
-SLSB12-340-M150			19	3.5	340	150			190					312	1.5				131.7	240	○
ST42-SLSB12-445-M157	2				445	157	42		260	185	35.5	41.5	M24	417	2.8	12.6		59.5	162.5	×	
ST32-SLRB16-175-M 45	1	16	32	8	175	45	32	32	130	-	-	-	M16	80	0.8	16.6	-	81	-	○	
ST25-SLSB16-175-M 50			24	4		50	25		125				M10		0.5					○	
ST32-SLSB16-290-M100					290	100	32		190			31.5	M16		1.4	17	14		190	○	
ST42-SLRB16-355-M 67	2		32	8	355	67	42		260	95	39	41.5	M24	327	2.7		21	73.5	-	○	
-SLSB16-445-M157	1		24	4	445	157				-	40.5			417	3			165.8	424.5	○	
ST42-SLRB20-170-M 70	1	20	38	9	170	70	42	40	100	-	-	41.5	M24	142	1.3	21	21	109.5	154	○	
ST32-SLSB20-175-M 50			29	4.5	175	50	32		125			31.5	M16	80	0.8			81	-	○	
ST42-SLSB20-255-M155					255	155	42		100			41.5	M24	227	1.7		22	194.5		○	
-SLRB20-330-M 70			38	9	330	70			260					302	2.6		22.6	189.5	314	○	
-SLSB20-415-M155			29	4.5	415	155								387	2.9	21.6	22	69.5	135	○	
ST42-SLRB25-170-M 42	2	25	45	10	170	42	42	45	100	70	49.6	53	M24	120	1.5	26	22.6	121	154	○	
-250-M 42					250				180		49.4	50		80	2.1	25.6	22	81	-	○	

特点

加热装置

一体型 3-
一体型 CURVE

一体型系列

2 体型系列

UNO

强力型 热媒刀磨




Z

直柄延长杆

相关商品

周边机器

技术资料

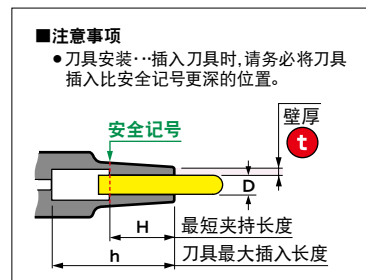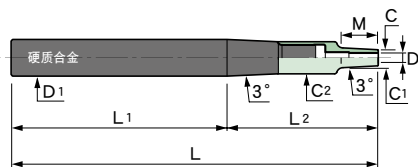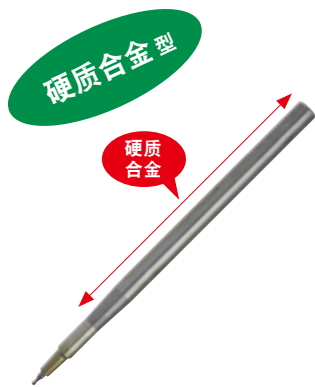

型号	φD	φC	t	L	M	D1	H	L1	L2	φC1	φC2	h	Kg	φD2	φD3	H1					
ST10C-SLSA 3-160	3	6	1.5	160	12	10	9	120	40	7.3	10	19	0.2	4	—	17					
ST16C-SLSA 3-280				280		16		182	98								0.7				
ST10C-SLSA 4-160	4	7	1.5	160	12	10	12	120	40	8.3	10	19	0.2	5	—	17					
ST16C-SLSA 4-280				280		16		182	98								0.7				
ST12C-SLSB 6-175	6	10	2	175	19.1	12	18	125	50	—	12	27	0.3	7	—	25					
ST16C-SLSB 6-225				225	22			16	165							60	12.3	16	32	0.6	28
ST20C-SLSB 6-320				320	20			221	99							1.3	8				
ST25C-SLSB 6-360				360	25			242	118							2.2	33				
ST16C-SLSB 8-225	8	13	2.5	225	22	16	24	165	60	15.3	16	32	0.6	9	—	28					
ST20C-SLSB 8-270				270		20		200	70							20	38	1.1	33		
ST25C-SLSB 8-360				360		25		242	118							2.2					
ST20C-SLSB10-270	10	16	3	270	22	20	30	200	70	18.3	20	38	1.1	11	—	33					
ST25C-SLSB10-360				360		25		242	118								2.2				

硬质合金直柄延长杆部件型号表

组合型号	硬质合金柄型号	柄头型号
ST10C-SLSA 3-160	ST10C-7-120	SH 7-SLSA 3-40
-SLSA 4-160		-SLSA 4-40
ST12C-SLSB 6-175	ST12C-9-125	SH 9-SLSB 6-50
ST16C-SLSA 3-280	ST16C-7-240	SH 7-SLSA 3-40
-SLSA 4-280		-SLSA 4-40
-SLSB 6-225		SH12.5-SLSB 6-60
-SLSB 8-225		SH12.5-SLSB 8-60
ST20C-SLSB 6-320	ST20C-12.5-260	SH12.5-SLSB 6-60
-SLSB 8-270	-16-200	SH16-SLSB 8-70
-SLSB10-270		SH16-SLSB10-70
ST25C-SLSB 6-360	ST25C-16-290	SH16-SLSB 6-70
-SLSB 8-360		-SLSB 8-70
-SLSB10-360		-SLSB10-70

